


PUMI® 24-3.67 CS

Truck-mounted concrete pump with mixer

CS transfer tube system

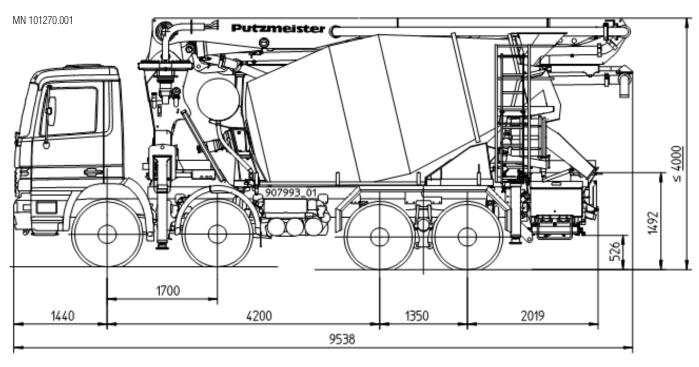

Note: Standard version. Dimensions and weights depend on boom, mixer and chassis.

Dimensions in mm, MB-Actros as example, total height depends on the chassis.

Technical data

Boom TMM 24-3						
Number of arms			3			
Reach height		m	23.8			
Horizontal	gross	m	20.0			
reach	net	m	17.6			
Reach depth max.		m	12.4			
Unfolding height		m	6.9			
End hose length		m	3			
Folding system			Z fold (Z)			
Delivery line			DN 125 - 5.5			

Pump TMP 60 CS		
Output	m³/h	56
Delivery pressure	bar	57
Delivery cylinder	Ømm	230
Stroke	mm	700


Maximum outputs of 56 m³/h and maximum concrete pressures of 57 bar may be achieved, depending on the equipment of the machine.


It is not possible to achieve maximum outputs and maximum concrete pressures simultaneously.


All data maximum theoretical.

Truck mixer 7 cbm			
Nominal capacity	m³	7	
Total capacity	m³	11.5	
Filling ratio	%	63	
Power consumption	kW	52	
Drum speed	rpm	1 - 14	
Pressure tank for water	I	650	

Reach information diagram, Support, Transfer tube

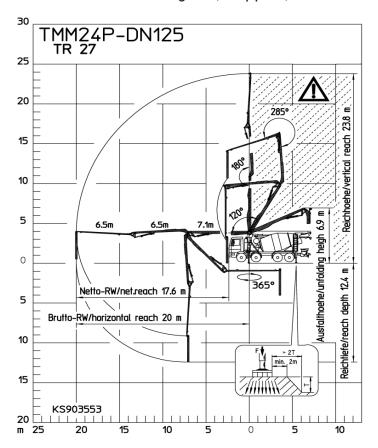



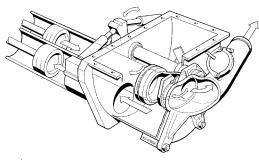

 $\overline{\mathbb{A}}$

Range in which you must not work with the end hose.

Delivery scope

Support	
Support legs rear 1	0

Support legs T 4

Support plates 4x in 2 magazines
Illumination

Marker lamps lateral and rear side, EU

Working light for hopper illumination, mounted

Extras

Operating manuals 2 x (1 x paper, 1 x CD-ROM) spare part lists

Painting:

mixer MB 1227 chrome yellow pump MB 1227 chrome yellow arm assembly RAL 3020 signalred

Tool set incl. standard equipment

Chassis horn operated in control box

Commpressed air connection

Towing eye

Remote control

Radio remote control fully prop.

Mixer-comfort-functions through display radio remote

Remote control CPC with 25 m cable

Control platform with display, rear side

Electric control box with display and ergonic diag. interface

EOC (Ergonic output control)

EPS (Erconic pump system)

Information concrete stiffness on display

Mixer control via chassis cabin with display

Delivery line

Delivery line (1-layer) PM 40 (DN 125 5.5"), arm assembly

End hose 3.0 m DN 125 5.5"

Mixing drum

Truck mixer 7 cbm

Water tank 650 I, pressure tank

Water tap under water tank

Chute extension steel 1 x

Ladder, telescopic

EMC (Ergonic mixer control)

Mixer discharge automatically

Chute adjustment hydr. mechan.

Second drip ring on mixer drum

Watertank filling from both sides

Wear plate on discharge hopper

Wear plate on inlet hopper

Cleaning

High pressure water pump 100bar with running dry connection

Cleaning hose with nozzle

Bracket for hammer and cleaning brush

Cardan shaft maintenance free

Safety

Agitator safety switch off

Lateral underrun protection

Underrun protection, rear side

Mudgard cpl. aluminium (bulb plate), rear axle

Stowage compartment

Hose bracket for 6x DN 65, 5 m for 4 axle

Tool box plastic

Hopper

Concrete hopper with agitator

Rubber collar on concrete hopper

Central lubrication hopper, electrically

Level indicator

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@pmw.de Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 1301